

→ W.NR.:	1.2343 EFS (EN ISO 4957)
→ EN / DIN:	X37CrMoV5-1
→ AISI:	H11

### → CHEMICAL COMPOSITION (W%)

C	Si	Mn	Cr	Mo	V
0.38	1.00	0.40	5.10	1.25	0.40

→ DELIVERY CONDITION: soft annealed with a hardness of <229 HB

→ PROCESS: conventional, Extra fine structure - EFS

### → HEAT TREATMENT

<b>soft annealing</b>	<b>cooling</b>	<b>hardness (HB)</b>
800-840 °C	furnace	<229
<b>hardening</b>	<b>quenching</b>	<b>hardness (HRC)</b>
1000-1040 °C	air, oil, warm bath 500-550 ° C	50-56

### → PROPERTIES

High tempering resistance and toughness in hot applications. The toughness of this steel is slightly greater than that of RS 411. The steel is well-hardened . Water-cooling during operation may also be used. It can be nitrated.


### → APPLICATION

For the production of tools for the die casting of aluminium and zinc, for die forging and aluminium extrusion: pressure plates, pistons, recipients, die holders. For plastics processing with the option to polish. Blades for shredding waste rubber. Usual working hardness of between 42 and 48 HRC.


### → ULTRASOUND EXAMINATION

EN 10228-3 art.2-4, SEP1921 E/e

tt

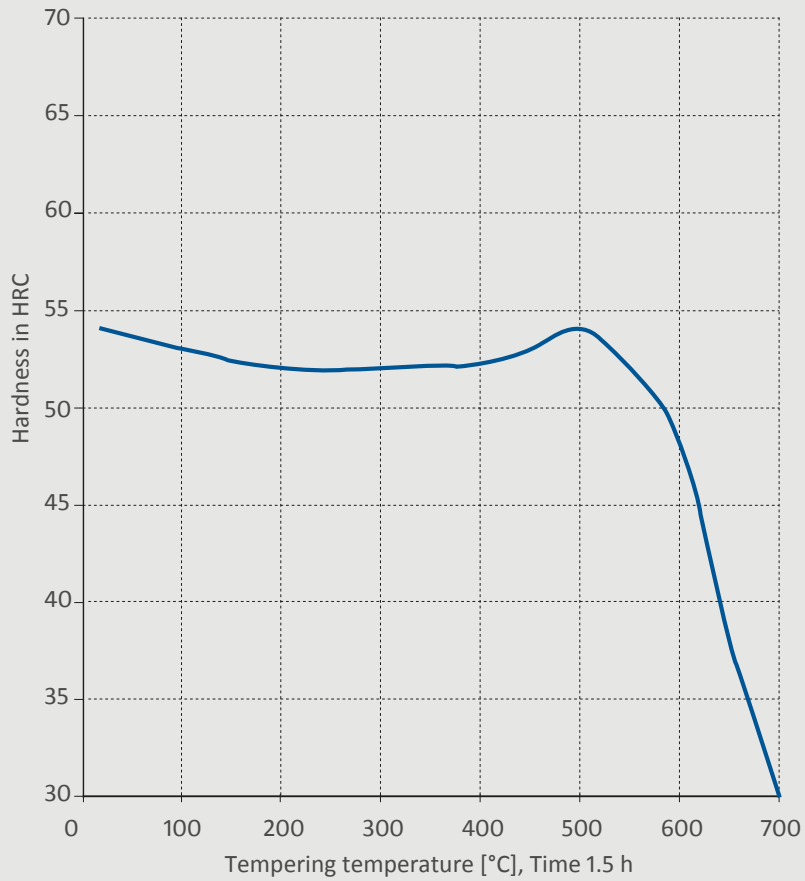

cct

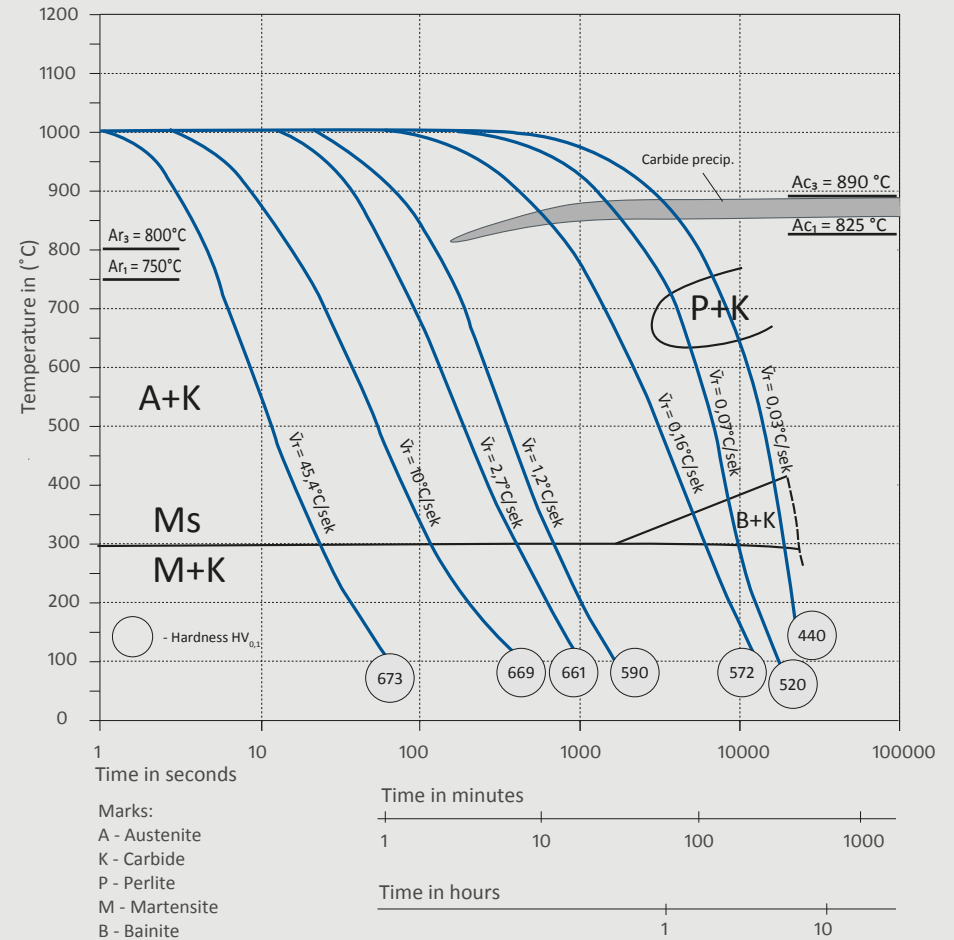

### DISCLAIMER

The information and data presented herein are typical or average values and are not a guarantee of maximum or minimum values. Applications specifically suggested for material described herein are made solely for the purpose of illustration to enable the reader to make his own evaluation and are not intended as warranties, either express or implied, of fitness for these or other purposes. There is no representation that the recipient of this literature will receive updated editions as the become available.